
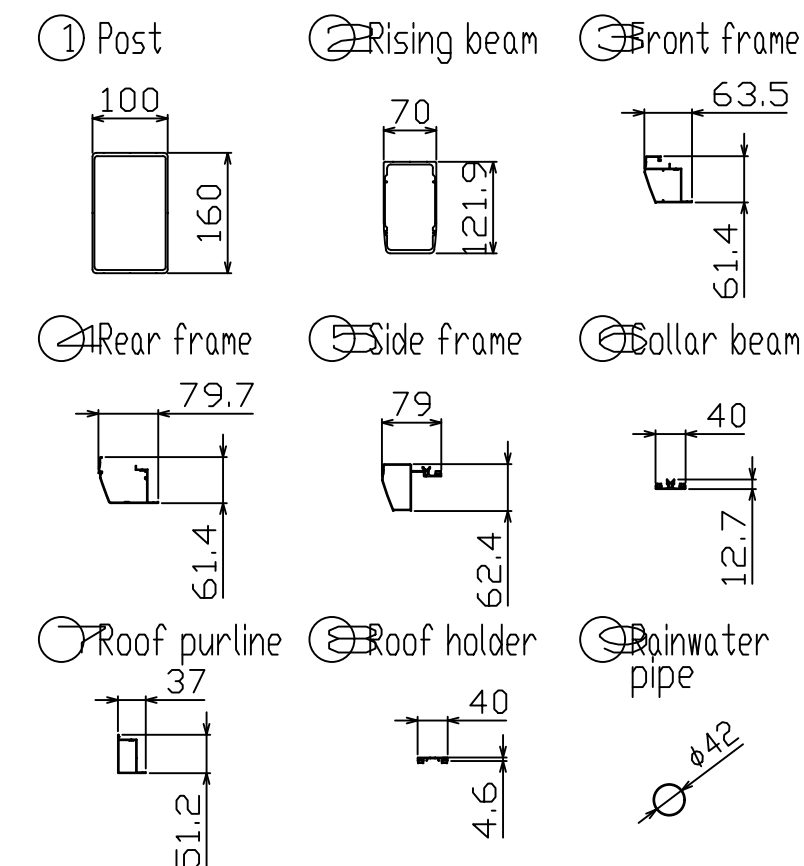


Intallation drawing<S=1/50>

* VFE-P2750

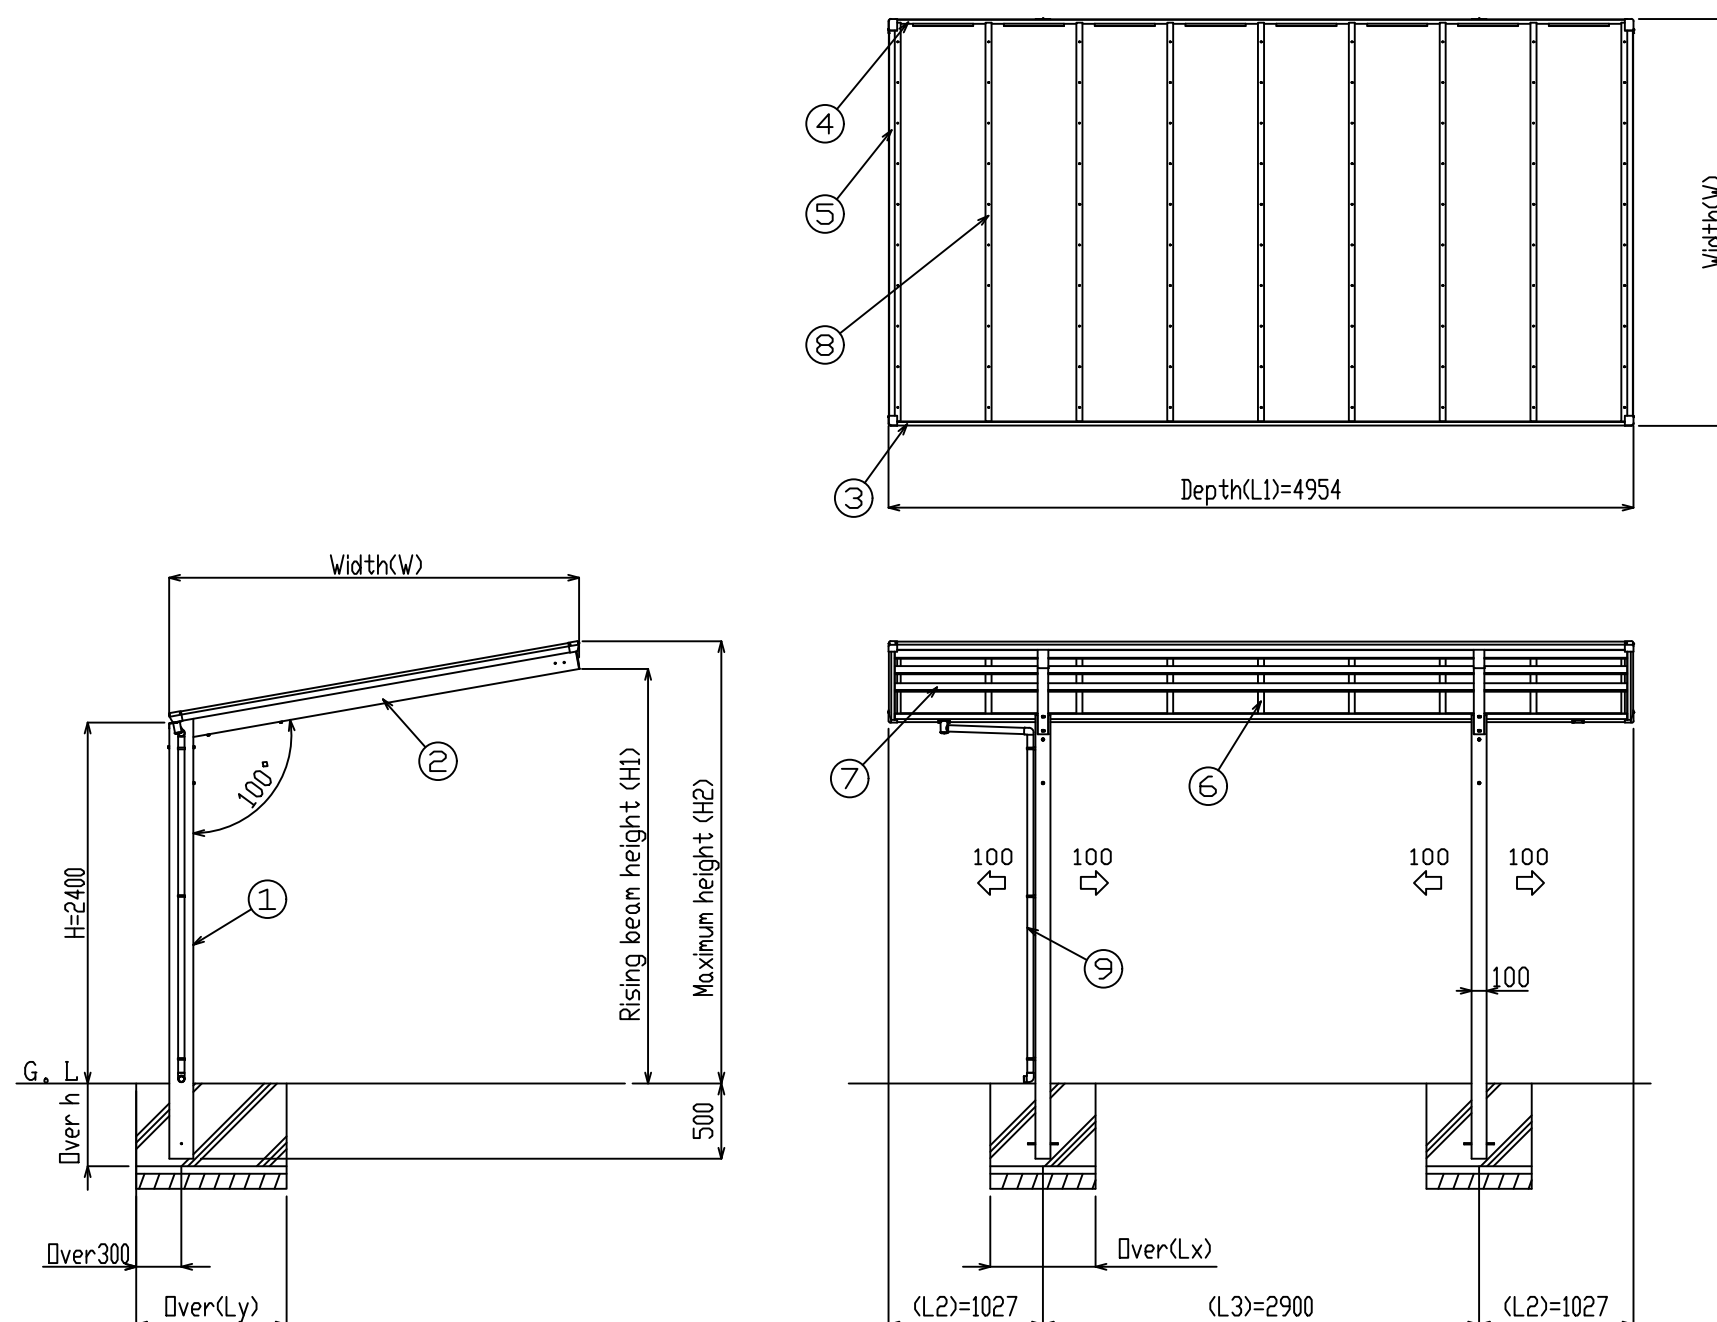

Code	Width W (mm)	Depth L1 (mm)	L2 (mm)	L3 (mm)	Rising beam height H1 (mm)	Maximum height H2 (mm)	H3 (mm)	Foundation size		
								Ly (mm)	Lx (mm)	h (mm)
VFE -2450	2431	4954	1027	2900	2704	2889	2400	800	700	550
VFE -2456	2431	5558	1179	3200	2704	2889	2400	800	700	550
VFE -2750	2726	4954	1027	2900	2756	2941	2400	1000	700	550
VFE -2756	2726	5558	1179	3200	2756	2941	2400	1000	700	550
VFE -3050	3022	4954	1027	2900	2808	2993	2400	1200	700	550
VFE -3056	3022	5558	1179	3200	2808	2993	2400	1200	700	550

Bolts	stainless
Roofing	heat resistance polycarbonate plate
⑨ Rainwater pipe	AAS
⑧ Roof-holder	anodized coating composite film aluminum extruded material
⑦ Roof-purline	anodized coating composite film aluminum extruded material
⑥ Collar-beam	anodized coating composite film aluminum extruded material
⑤ Side-frame	anodized coating composite film aluminum extruded material
④ Rear-frame	anodized coating composite film aluminum extruded material
③ Front-frame	anodized coating composite film aluminum extruded material
② Rising beam	anodized coating composite film aluminum extruded material
① Post	anodized coating composite film aluminum extruded material
main parts	spec(material・coating)
model code	VFE-P2750
name of product	Value Port Flat 600N/? (Basic unit)